

The Dulux logo is displayed in white text on a dark blue rectangular background.The Acratex logo is displayed in white text on a dark blue rectangular background, positioned below the Dulux logo.

YOUR PARTNER IN COMPLIANCE

NCC COMPLIANCE SOLUTIONS FROM DULUX ACRATEX

For over 50 years, Dulux Acratex has been providing coating system solutions to industry professionals. We consider NCC & Australian Standards requirements and offer solutions that are fit for purpose for Class 2-9 and Class 1 & 10 buildings.

These include all technical & compliance considerations for weatherproofing, non-combustibility and waterproofing, as well as durability, warranty maintenance & service life.


Coating Compliance to NCC 2022 Volume One

Solid Aluminium	Fibre Cement	Masonry & AAC
Factory Pre-coated C2D10(6)(e) or Paint, or similar finish C2D10(4)(o) When painted on-site Complies to NCC C2D10(4)(o) and F3P1	Pre-primed coating, C2D10(4)(o), and Painted on-site C2D10(4)(o) and/or Textured Paint When painted on-site, C2D10(4)(o) Complies to NCC C2D10(4)(o) and F3P1	Layer one: Base coat render, Non-Combustibility AS 1530.1 Layer two: Textured Paint, 0.2-4mm thickness – C2D10(4)(o) Paint (Standards Australia) – HB 50-2004 Glossary of Building Terms Layer three: Paint weatherproof layer (membrane paint) C2D10(4)(o) Complies to NCC C2D10(4)(o) and F3P1

PATHWAY TO COMPLIANCE

WE ARE YOUR SUBJECT MATTER EXPERT FOR SOLUTIONS THAT FOLLOW THE PATHWAY TO NCC COMPLIANCE.

- Ability to translate NCC & Aust Standards to fit for purpose solutions
- Project specific specifications in accordance with the NCC criteria
- Coating solutions that comply and are fit for purpose.

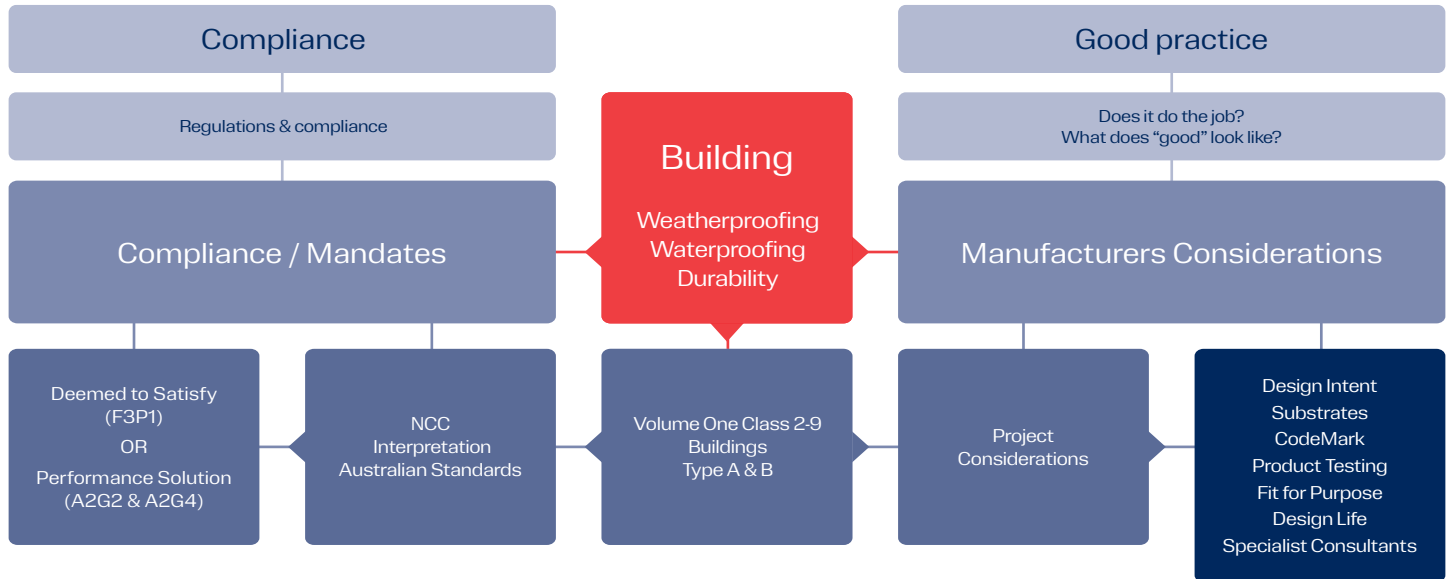

Common Industry Terms

Non Combustible: Coating materials tested to AS 1530.1 are typically cement-based and are only suitable as a base levelling coat for use over concrete, brick & block work and AAC autoclaved aerated concrete.

Weatherproofing: Roof and external wall compliance with F3P1 to prevent water penetration. F3D5 references the standards for external walls as Deemed to Satisfy solutions (DtS).

Textured Paint: Is the aesthetic finish that looks like a render coating and by virtue of its composition & method of application, can produce a variety of rough, sandy, patterned textured finishes (by heavy brush, roller or trowel).

External waterproofing: Intended to minimize the risk of water leaking into or accumulating within a building causing unhealthy conditions or damaging building elements by corrosion or rot.

www.constructiondictionary.com.au: An online dictionary of terms for the building and plumbing industries jointly published by Standards Australia and the ABCB that combines terms and definitions of the NCC and HB50:2004 Glossary of Building Terms. Provides assistance to understand the different terminologies describing similar terms and processes across the Australian built environment.

For further information go to acratex.com.au
or duspecplus.com.au

Dulux® Acratex® is a division of DuluxGroup (Australia) Pty Ltd. ABN 67 000 049 427.
Dulux® and Acratex® are registered trademarks of DuluxGroup (Australia) Pty Ltd.

